



Since 1994, DIGITAL LEADER Axis Sensitive Co. Ltd

Industrial Explosion Proof Load Cell



AXIS
SENSITIVE

MODEL : PC22-EXP



제품 규격 [UNIT : mm]

Product Specification

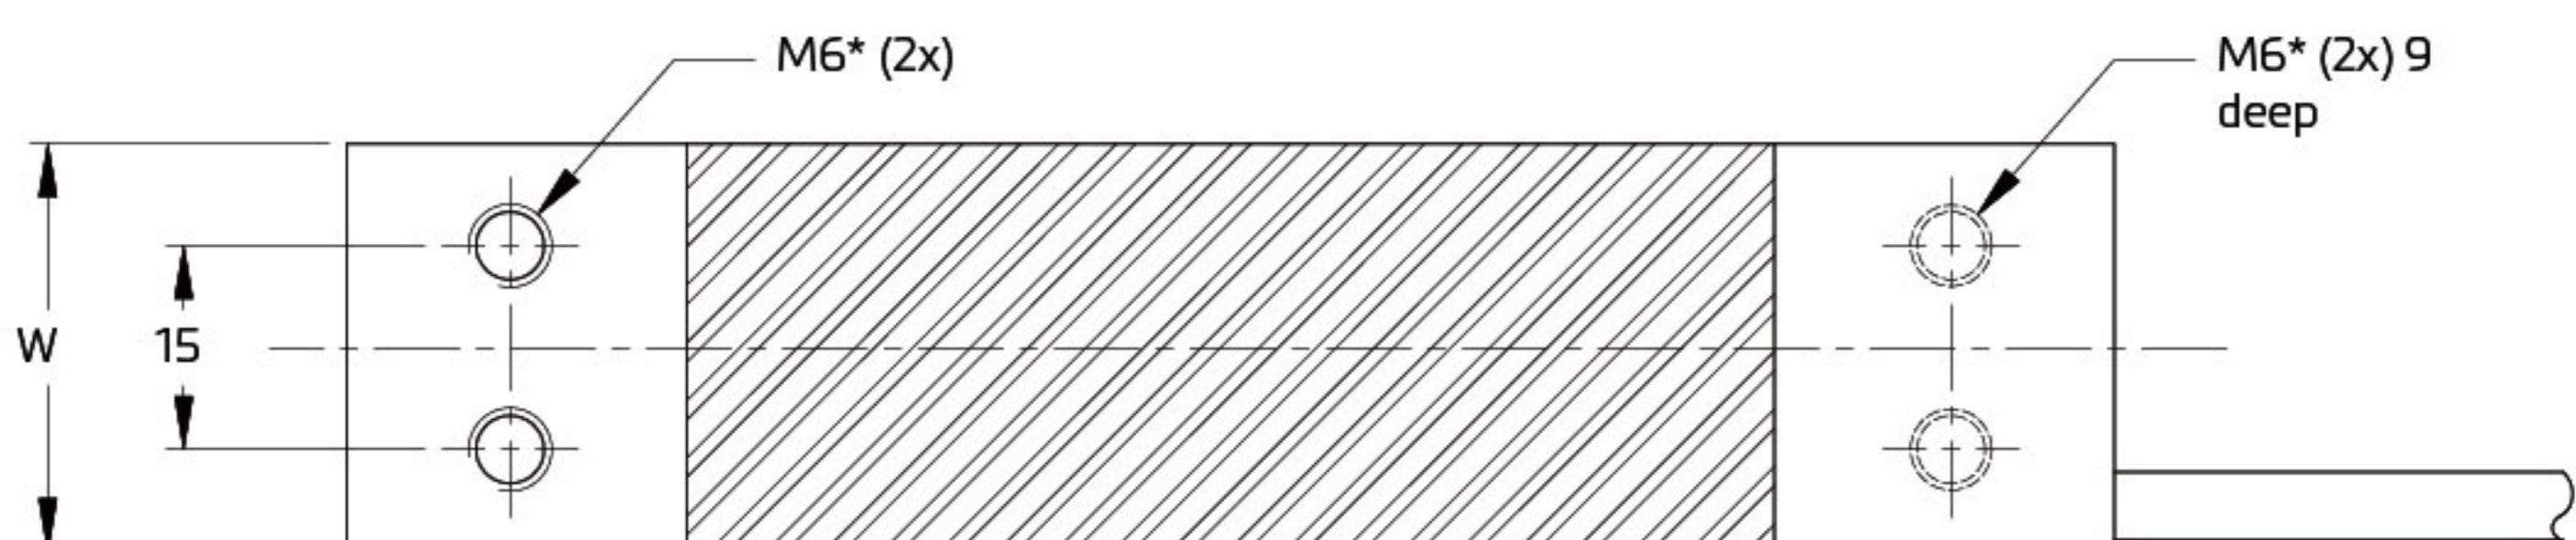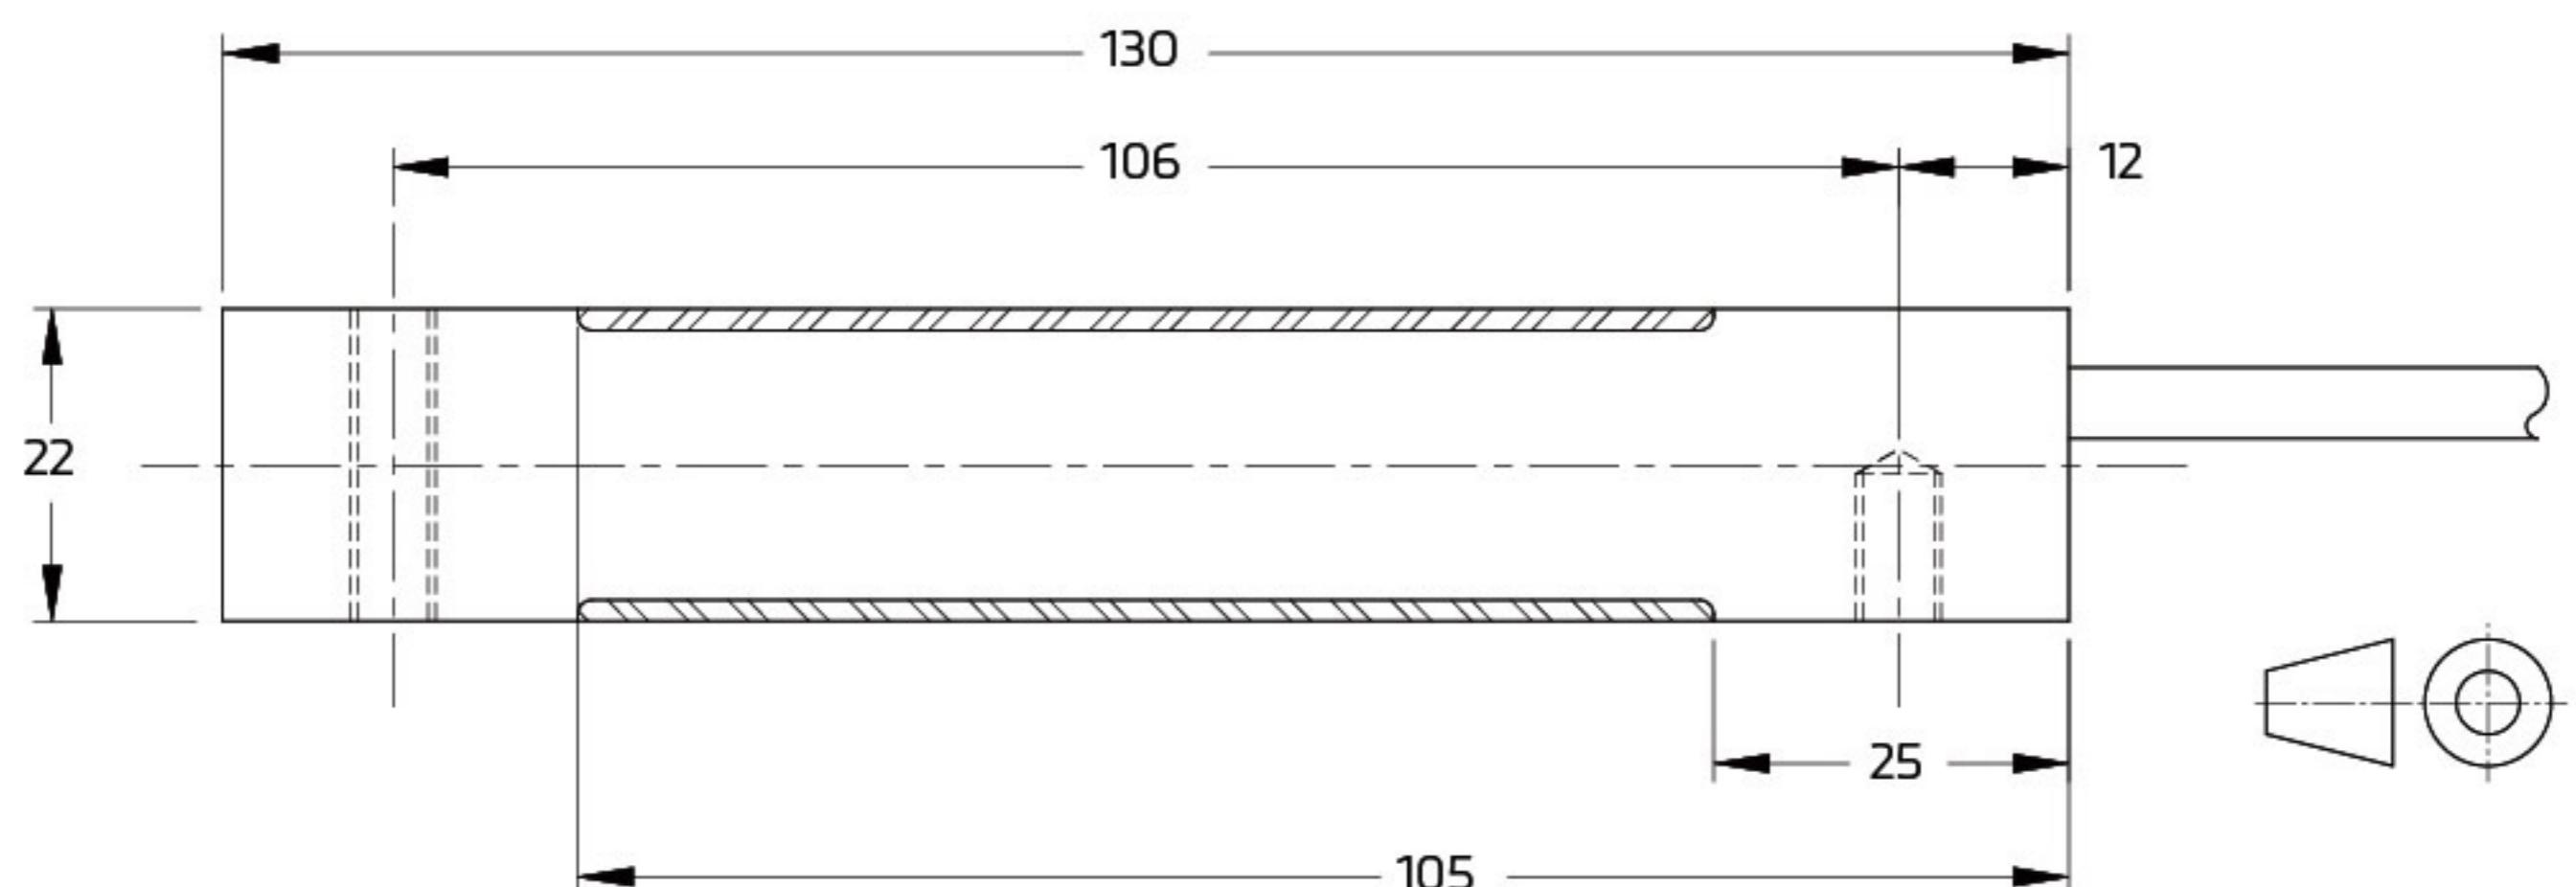

Capacity (kg)	W	
5, 10	25.4	+0.2
		-1.0
20, 30, 40	30	0.2
		-1

Mounting bolts M6 8.8; torque 10 Nm. Torque value assumes oiled threads.

* Unified thread 1/4-20 UNC is available.


The load cell is provided with a shielded, 6 conductor cable (AWG 26).

Cable jacket: polyurethane

Cable length: 2 m

Cable diameter: 5 mm

The shield is connected to the load cell body

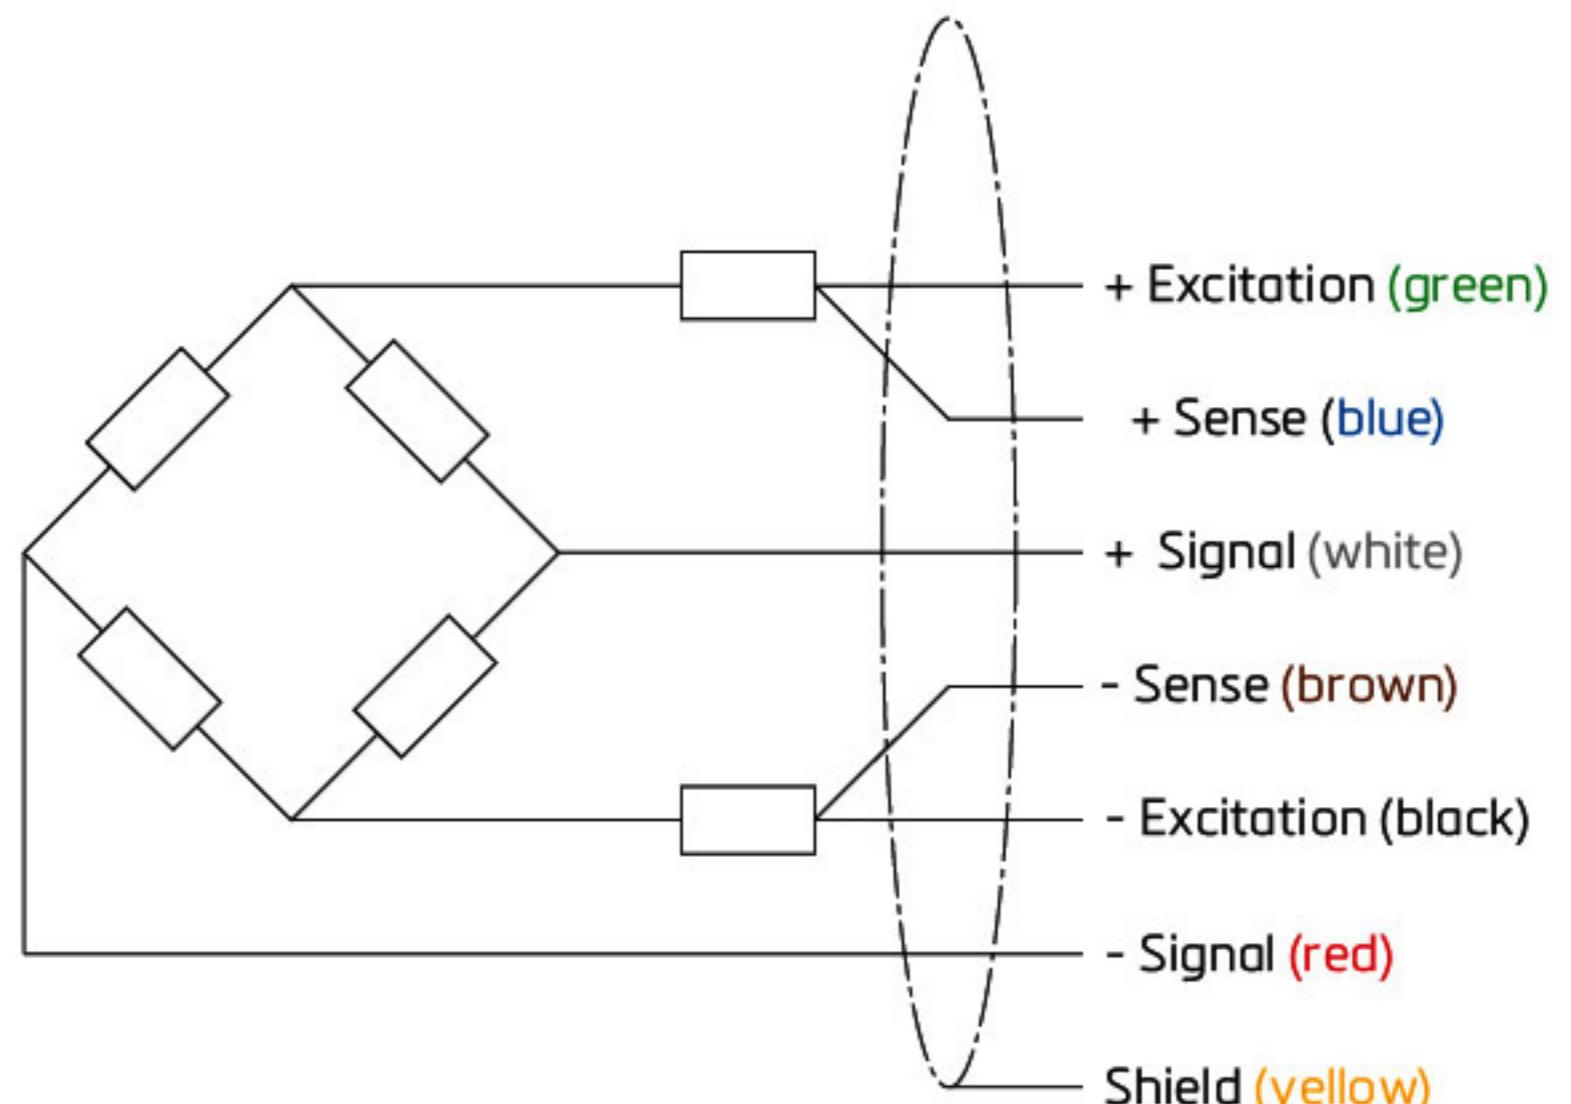

제품 사양

Specification

- ▶ 다양한 계량 어플리케이션에 이상적인 소형, 저용량 알루미늄
싱글 포인트 로드셀
- ▶ 외부환경에 대한 내구성을 보장하기 위해 컴파운드 포팅 방식으
완전 밀봉처리
- ▶ 업계 표준 규격 구성으로 새로운 장비 제조업체 또는 교체용으로
이상적

Maximum capacity (E_{\max})	kg	5 / 10 / 20 / 30 / 40	
Accuracy class according to OIML R60	(GP)	C3	
Maximum number of verification intervals (n_{LC})	n.a.	3,000	
Minimum load cell verification interval (v_{min})	n.a.	$E_{\max} / 6,000$	
Temperature effect on minimum dead load output (TC_0)	%*RO/10°C	± 0.0400	± 0.0233
Temperature effect on sensitivity (TC_{RO})	%*RO/10°C	± 0.0200	± 0.0100
Combined error	%*RO	± 0.0500	± 0.0200
Non-linearity	%*RO	± 0.0400	± 0.0166
Hysteresis	%*RO	± 0.0400	± 0.0166
Creep error (30 minutes) / DR	%*RO	± 0.0600	± 0.0166
Optional: Min. load cell verification interval (v_{min} opt)	n.a.	$E_{\max} / 12,000$	
Optional: Temp. effect on min. dead load output (TC_0 opt)	%*RO/10°C	n.a.	± 0.0117
Rated Output (RO)	mV/V	$2 \pm 10\%$	
Zero balance	%*RO	± 5	
Excitation voltage	V	5...15	
Input resistance (R_{LC})	Ω	413 ± 20	
Output resistance (R_{out})	Ω	350 ± 25	
Insulation resistance (100 V DC)	M Ω	$\geq 5,000$	
Safe load limit (E_{lim})	%* E_{\max}	150	
Ultimate load	%* E_{\max}	300	
Safe side load	%* E_{\max}	100	
Maximum platform size; loading acc. to OIML R76	mm	350 x 350	
Maximum off centre distance at maximum capacity	mm	115	
Compensated temperature range	°C	-10...+40	
Operating temperature range	°C	-20...+65 (ATEX -20...+60)	
Load cell material		aluminium	
Sealing		potted	
Protection according EN 60 529		IP67	
Packet weight	kg	0.35	

The limits for Non-Linearity, Hysteresis, and TC_{RO} are typical values.

The sum of Non-linearity, Hysteresis and TC_{RO} meets the requirements according to OIML R60 with $p_{LC}=0.7$.

- › 알루미늄 구조 / 포팅으로 환경 친화적인 밀봉
- › 로우 프로파일 디자인
- › 플랫폼 규격 350 X 350mm
- › 로드셀 케이블 : 폴리 우레탄 2m x 5mm
- › EN 60 529에 따른 보호 : IP 67