

Ex d IIC T6 IP65



• Data

모 델	박스규격	Max. T/B (20A)	Dimension(mm)					ØX	H
			A	B	C	D			
FJG-10	165×178×150	20 P	165	178	200	145	10	150	
FJG-20	190×205×180	20 P	190	205	220	170	10	180	
FJG-40	300×300×200	40 P	300	300	335	235	10	200	
FJG-60	400×500×240	60 P	400	500	460	400	15	240	
FJG-100	500×550×260	80 P	500	550	550	440	15	260	


• Max. size hubs that can be used

박스규격	Hub Type	Max HUB Q'TY (PF, NPT, M)									
		1/2"(16C)	3/4"(22C)	M30	1"(28C)	1 1/4"(36C)	1 1/2"(42C)	2"(54C)	2 1/2"(70C)	3"(82C)	4"(104C)
		M20	M25		M32	M40	M50	M63	M75	M90	M110
165×178×150	Left & Right Top & Bottom	5/4	4/3	3/2	3/2	1/2	2/1	1/1	1/- 1/1	-/-	-
190×205×180		8/5	5/5	4/4	4/4	3/3	2/2	1/1	2/2	1/1	-
300×300×195		10/10	9/9	7/7	7/7	4/4	3/3	3/3	-	2/2	-
400×500×230		13/13	11/11	13/11	7/7	5/5	3/3	3/3	-	-/-	-
500×550×290		20/20	14/14	17/15	11/11	8/8	5/5	5/5	-	-/-	-

• Materials Data

Descriptions	Materials
Body	Cast Aluminum Alloy
Cover	Cast Aluminum Alloy

Ex e II T5 IP65

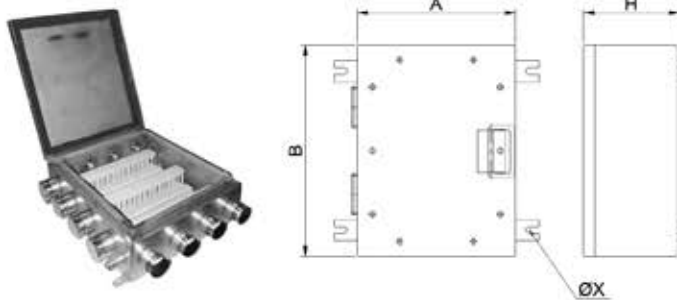

• Data

최대 전압	모 델	규 격	Max.T/B	Dimension(mm)			
				15A	A	B	ØX
AC 600V	WJB-40	300×400×200	40P	300	400	12	200
	WJB-60	400×500×200	60P	400	500	12	200
	WJB-1000	400×600×200	80P	400	600	12	200

• Max. size hubs that can be used

모 델	Hub Type	Max HUB Q'TY (PF, NPT, M)								
		1/2"(16C)	3/4"(22C)	1"(28C)	1 1/4"(36C)	1 1/2"(42C)	2"(54C)	2 1/2"(70C)	3"(82C)	4"(104C)
		M20	M25	M32	M40	M50	M63	M75	M90	M110
WJB-40	Left&Right Top&Bottom	14/10	13/9	11/7	5/4	4/3	4/3	-	-	-
WJB-60		18/14	16/13	11/11	6/5	6/4	5/4	-	-	-
WJB-1000		22/14	20/13	16/11	7/5	7/4	6/4	-	-	-

• Materials Data

Descriptions	Materials
Body	Stainless Steel
Cover	Stainless Steel