

Pendant Type

Ceiling Type

90° Bracket Type


40° Bracket Type

Flameproof Type LED (8.5W) Lighting Fixtures Data

* 방폭 · 방수 등급 : Ex d IIC T6 IP65 * / AC 220V 50/60Hz

Type	Model Number	Lamp Watt(W)	Weight(kg)
Pendant(천정긴형)	FYL-LED-11	8.5	3.8
Ceiling(천정형)	FYL-LED-21	8.5	3
90° Bracket	FYL-LED-31	8.5	4
40° Bracket	FYL-LED-41	8.5	4.4

재 질 : Mounting Box, Body, Guard : Die Cast Aluminum Alloy
Mogul : Porcelain With Mogul Socket / Globe : Heat Resistant Hard Glass

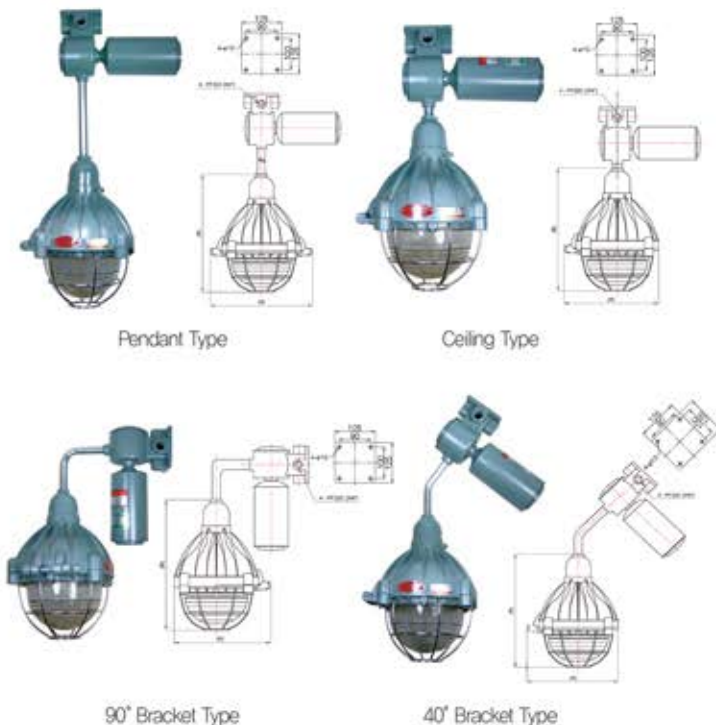

Pendant Type

Ceiling Type

90° Bracket Type

40° Bracket Type

Flameproof Type Mercury, Hi-Sodium, Metal Halide Lighting Fixtures (Ballast outer Type)

* 방폭 · 방수 등급 : Ex d IIB+H2 T3 IP65 * / AC 220V 50/60Hz

Type	Model Number	Lamp Watt(W)	Weight(kg)
Pendant 천정긴형	FAHL-1110	100	10
	FAHL-1115	150 (175)	14.5
	FAHL-1125	250	14.5
Ceiling 천정형	FAHL-2110	100	9.7
	FAHL-2115	150 (175)	14.2
	FAHL-2125	250	14.2
90° Bracket	FAHL-3110	100	9.7
	FAHL-3115	150 (175)	14.2
	FAHL-3125	250	14.2
40° Bracket	FAHL-4110	100	10
	FAHL-4115	150 (175)	14.5
	FAHL-4125	250	14.5
Pole	FAHL-5110	100	10
	FAHL-5115	150 (175)	14.5
	FAHL-5125	250	14.5

재 질 : Mounting Box, Body, Hood : Die Cast Aluminum Alloy /
Ballast Housing : Steel & Die Cast Aluminum Alloy
Mogul : Porcelain With Mogul Socket / Globe : Heat Resistant Hard Glass
Inner Reflector : High Purity Sheet Aluminum / Globe Guard : STS304 / Pole : Steel