


방폭형 압력 컨트롤 패널

EX-Pressurized Type Control Panel

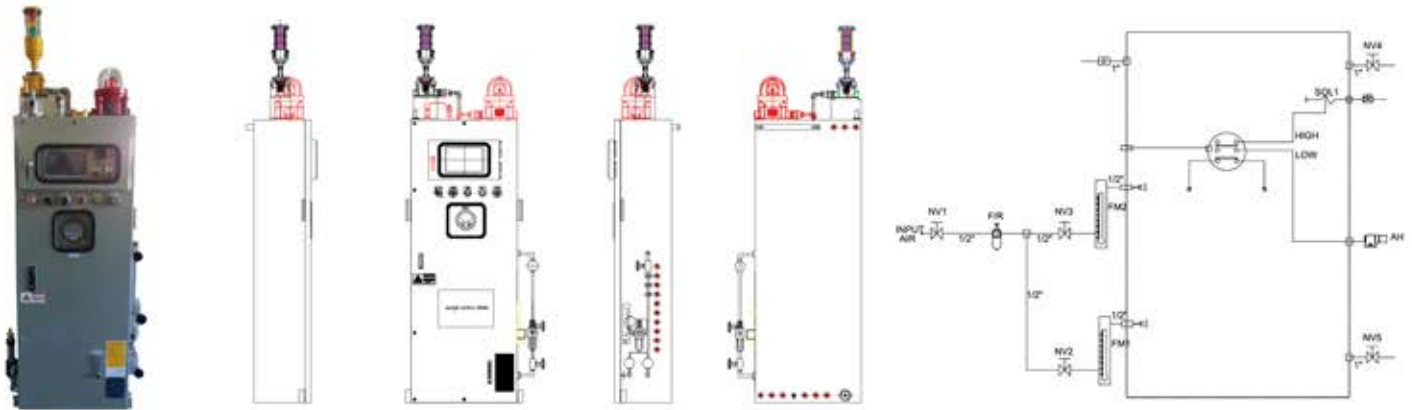

Ex pz IIC T4

• Data


최대 전압	규격	온도	습도	Protection Gas	Materials
AC 440V/220V	Max.	-20°C Ta +40°C	85% less than	Air & N2	SS41 / SUS304

• Circuit Diagram

NO	TAG	DESCRIPTION	SPEC	NO	TAG	DESCRIPTION	SPEC
1	NV1~2	NEEDLEVALVE	1/2"	7	PS	PRESSURE SWITCH	2000~100
2	NV3	NEEDLEVALVE	3/8"	8	RV	RELIEF VALVE	mmH2O
3	NV4~5	REGULATOR	1/2"	9	AH	SIREN	J48K
4	F/R	FILTER REGULATOR	W300-10	10	SOL1	SOLENOID VALVE	3/8"
5	FM1	FLOW METER	RMB300	11	SC	SPEED CONTROLLER	3/8"
6	FM2	FLOW METER	RMB100				

방폭형 내압 R-ITB 박스

EX-Flameproof Type R-ITB Box

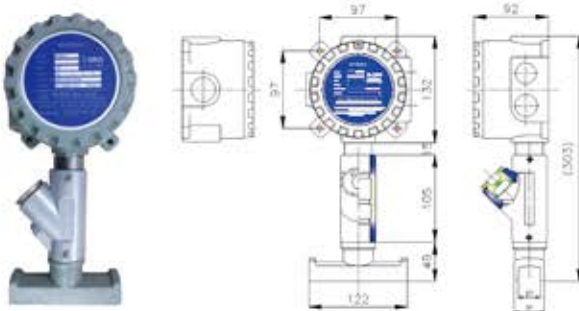


Ex d IIC T6 IP66

• Data

최대 전압	모 델	Current	무게(kg)	Materials
AC 600V	RTHB-01	Max, 20A	1,9	Cast Aluminium

방폭형 내압 카메라 하우징(CCTV용)

EX-Flameproof Type Camera Housing Box(CCTV)

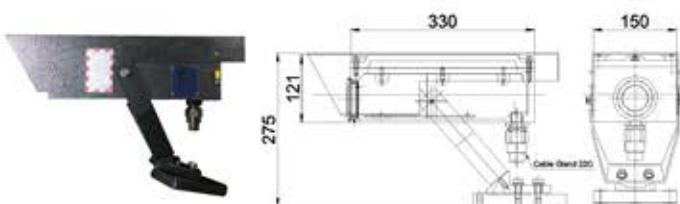

Ex d IIB+H2 T6

• Data

최대 전압	모 델	Current	무게(kg)	Materials
Max, AC 270V/DC24V	CHB	Max, 0.5A	4	Die Cast Aluminium